

**Solutions to Towler & Sinnott Chemical Engineering Design 2<sup>nd</sup> edition**

**Part I: Process Design**

[Chapter 1](#): Introduction

[Chapter 2](#): Flowsheet development

[Chapter 3](#): Utilities and energy recovery

[Chapter 4](#): Process simulation

[Chapter 5](#): Process control

[Chapter 6](#): Materials of construction

[Chapter 7](#): Estimating capital costs

[Chapter 8](#): Estimating costs of production

[Chapter 9](#): Economic analysis

[Chapter 10](#): Safety

[Chapter 11](#): Plant layout and environmental impact

[Chapter 12](#): Optimization

**Part II Plant Design**

[Chapter 13](#): Equipment design

[Chapter 14](#): Pressure vessel design

[Chapter 15](#): Reactor design

[Chapter 16](#): Separation processes

[Chapter 17](#): Multistage columns

[Chapter 18](#): Solids handling processes

[Chapter 19](#): Heat transfer equipment

[Chapter 20](#): Plant hydraulics

Note that most of the problems involve design and so have no single unique answer. Credit should be given to students who have followed the right method and found similar solutions. Indeed, the probability of any student independently coming up with the exact answers given in the solution set for more than a few problems should be vanishingly small and this event should cause the grader to be suspicious. The “optimal” solutions presented are usually not numerically optimal and are merely close enough to optimal to be good enough for engineering purposes. This reflects the optimization philosophy described in Chapter 12.

When teaching design, I usually do not give the teaching assistants prepared solutions to the homework problems. I find that if they have to work through the problems themselves they are much better prepared to help the students. They are usually not too happy about it, but it does them good and builds character.

## Chapter 1


### **Problem 1.1**

There are many possible correct answers to this question and it can be answered in varying levels of detail. The key steps that should be included for each process with typical required times are listed below. The project plan can be sketched using a spreadsheet or drawn up using a project planning tool such as MS Project (as in Problem 1.2).

- a) A petrochemical process using established technology, to be built on an existing site. Since the technology is established, there will be no need to generate design concepts and carry out R&D. The steps are then:
- Set design basis (1 week)
  - Evaluate economics, optimize and select design (typically 10-30 weeks, depending on project scope)
  - Detailed design and equipment selection (typically six months to one year)
  - Procurement and construction (typically one year)
  - Shakedown and start-up (typically one month)
- These steps are usually more or less sequential, although some procurement of long lead-time items may be started during detailed design.
- b) A process for full-scale manufacture of a new drug, based on a process currently undergoing pilot plant trials. Since the pilot plant is already operating the designer already has a good idea of the process flowsheet and the goal is to be prepared to ramp up production to full scale once the drug is approved. The steps are:
- Set design basis (1 week)
  - Confirm performance/scale-up of pilot plant operations (2-20 weeks, depending on how smoothly pilot plant runs)
  - Optimize and select design (10-20 weeks)
  - Detailed design and equipment selection (about six months)
- In parallel to these process design activities there will be activities related to getting approval for the new drug:
- Conduct clinical trials (6 months to 2 years)
  - Review clinical trial results (typically 3 to 6 months)
  - Obtain FDA approval
- Some of the procurement and construction activities will be started as soon as the first clinical results look promising, but final construction and shakedown will not occur until the review of clinical trials is completed.
- c) A novel process to convert cellulosic waste to fuel. The technology and flowsheet will need considerable development, so a schedule might be:
- Set design basis (1 week)
  - Generate design concepts & carry out R&D (one to five years)
  - Evaluate economics, optimize and select design (six months, but could run parallel to generating design concepts for up to five years)
  - Detailed design and equipment selection (six months to one year)
  - Procurement and construction (about one year)
  - Shakedown and start-up (one month to one year, as there may be start-up hiccups with a new technology)
- d) A spent nuclear fuel reprocessing facility. There is established technology for nuclear fuel reprocessing, but new processes are always possible. For an established technology the schedule would look much like problem (i) and for new technology it would look like problem (iv). All of the steps would probably take longer because of the scale of the plant and additional steps would be needed for obtaining local, state and federal permits and revising them after setting the design basis, selecting the design, and completing detailed design. The time taken to obtain permits could be several years and the total time to operation would probably exceed ten years.
- e) A solvent recovery system for electronics production. This is a relatively small project, so the steps would be:
- Set design basis (1 – 2 days)
  - Generate design concepts (1 to 2 months)
  - Evaluate economics, optimize and select design (ten weeks or less)
  - Detailed design and equipment selection (2 to 3 months)
  - Procurement and construction (3 to 6 months)
  - Shakedown and start-up (one month)

### Problem 1.2

This requires a more detailed breakdown than problem 1.1. A sample project plan is given in the lecture slides and shown below (in MS Project format):

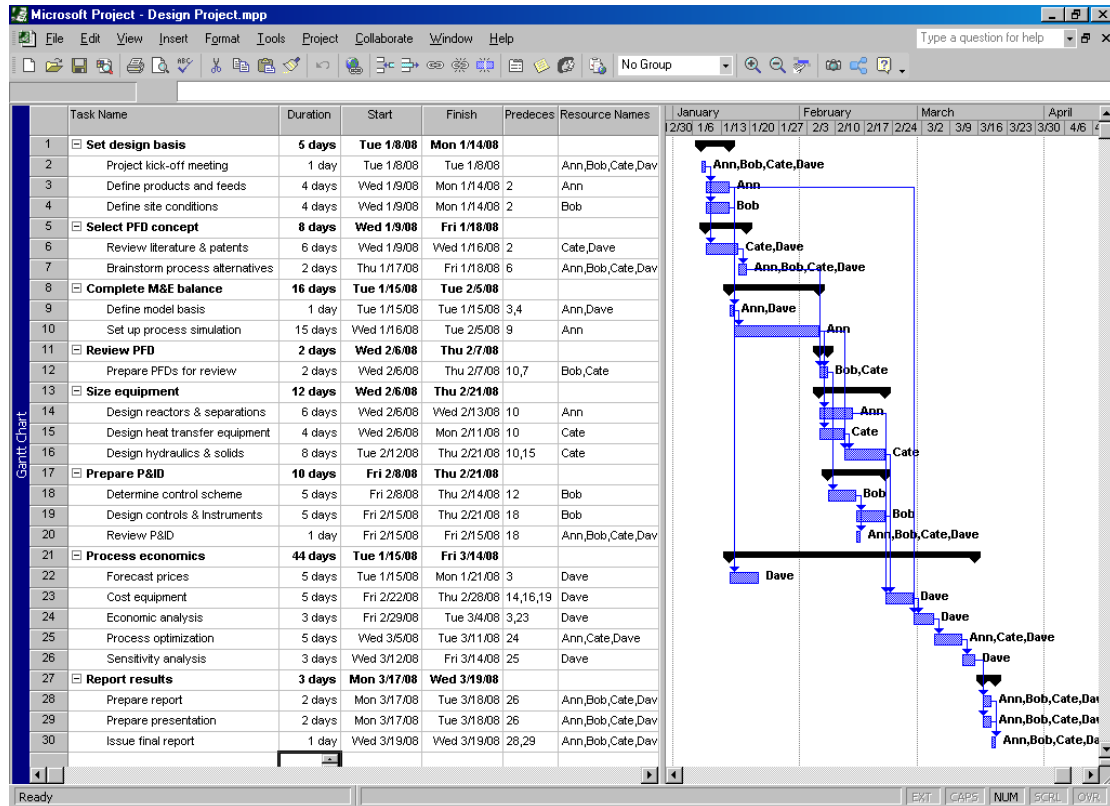

Suitable intermediate deliverables could include:

- The design basis
- A completed PFD (or PFD review)
- A completed process simulation
- A completed PID (or review)

### Problem 1.3

- a) The list of product requirements will be somewhat qualitative and depend on the preferences of the “customer” group. The required properties of the dough must consider properties of the dough itself, as well as properties of the final (home-baked) product. Some properties of the dough that might be considered include:

- Shelf life
- Calorie content
- Chocolate chip content
- Stiffness (do you scoop it or is it preformed in cookie shapes?)
- Baking time

Properties of the end cookies are perhaps more obvious:

- Chewiness
- Crunchiness
- Sweetness
- Saltiness
- Mouth feel
- Serving size (if pre-formed)

- b) The product specifications could include the following:

- Composition of major ingredients (see any cookie dough: flour, fat or oil, water, etc.)
- Composition of chocolate chips


- Size of chocolate chips
- Composition of minor flavors (salt, vanilla, etc.)
- Composition of baking soda?
- Type and composition of sweetening agent
- Type and composition of preservatives, stabilizers
- Type and composition of viscosity modifiers?
- Mixing order
- Mixing time, speed, temperature
- Dough aging / forming processes (extrusion, cutting, rolling, etc.)



Chapter 2


**Solution 2.1**

This process can be drawn in more detail, but a simple block-flow diagram is adequate. There may be a need for some heaters and coolers in the plant (e.g. after neutralization), but these are not described in the problem statement and would not need to be shown in a block-flow diagram. Since the process involves batch distillation, it would also be possible to operate the reactor in batch mode and then carry out the neutralization and wash stages in batch mode in the same vessel.

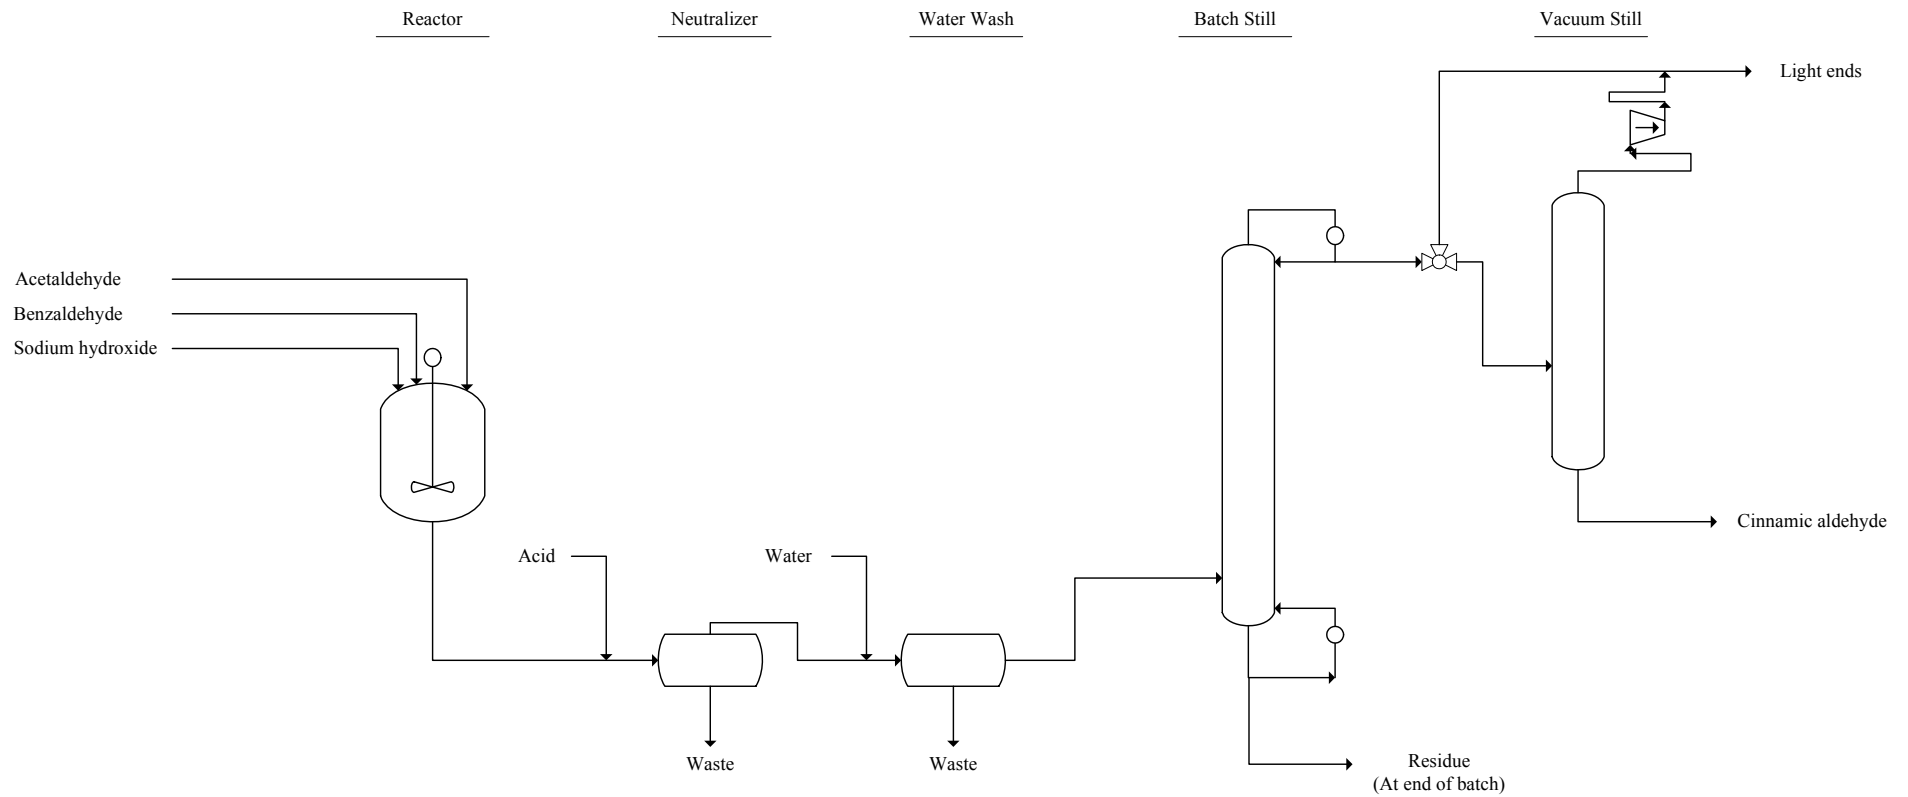


**Solution 2.2**

This is a continuous process and has a more complex flowsheet incorporating two recycles:

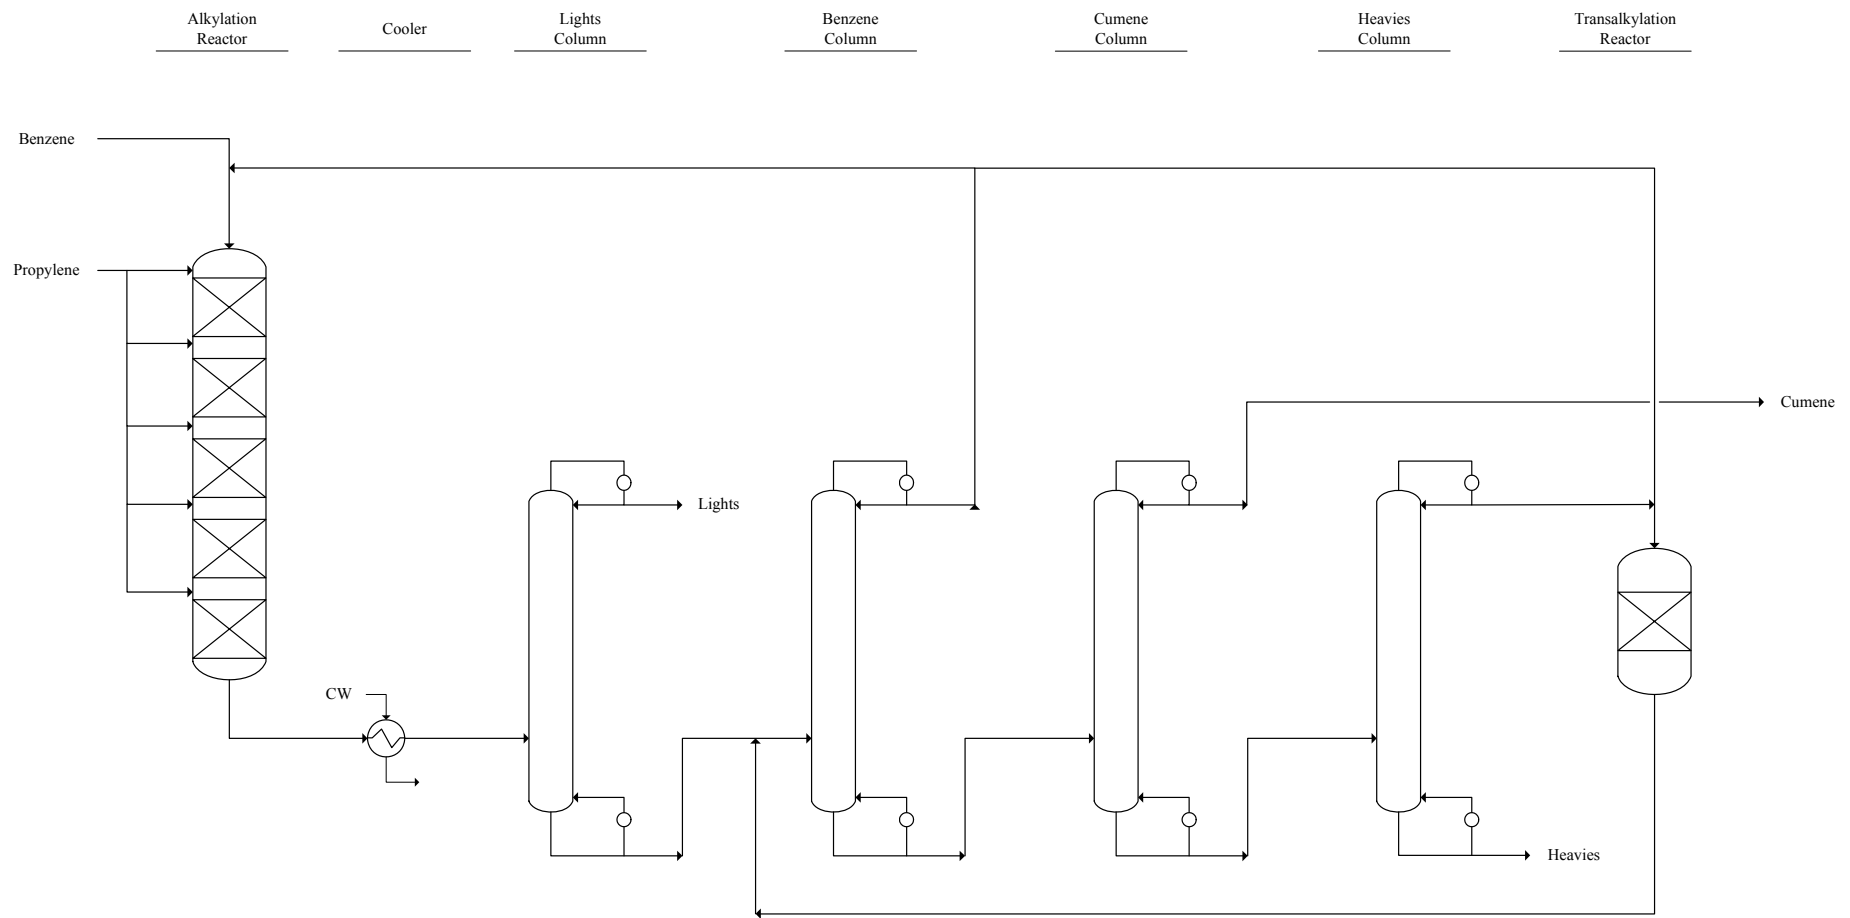

**Solution 2.3**


This is also a batch process in which some of the extraction steps could be carried out reusing the same equipment. The dashed line shows the reuse of the EDC evaporator to dissolve the product in MeOH for chromatography.

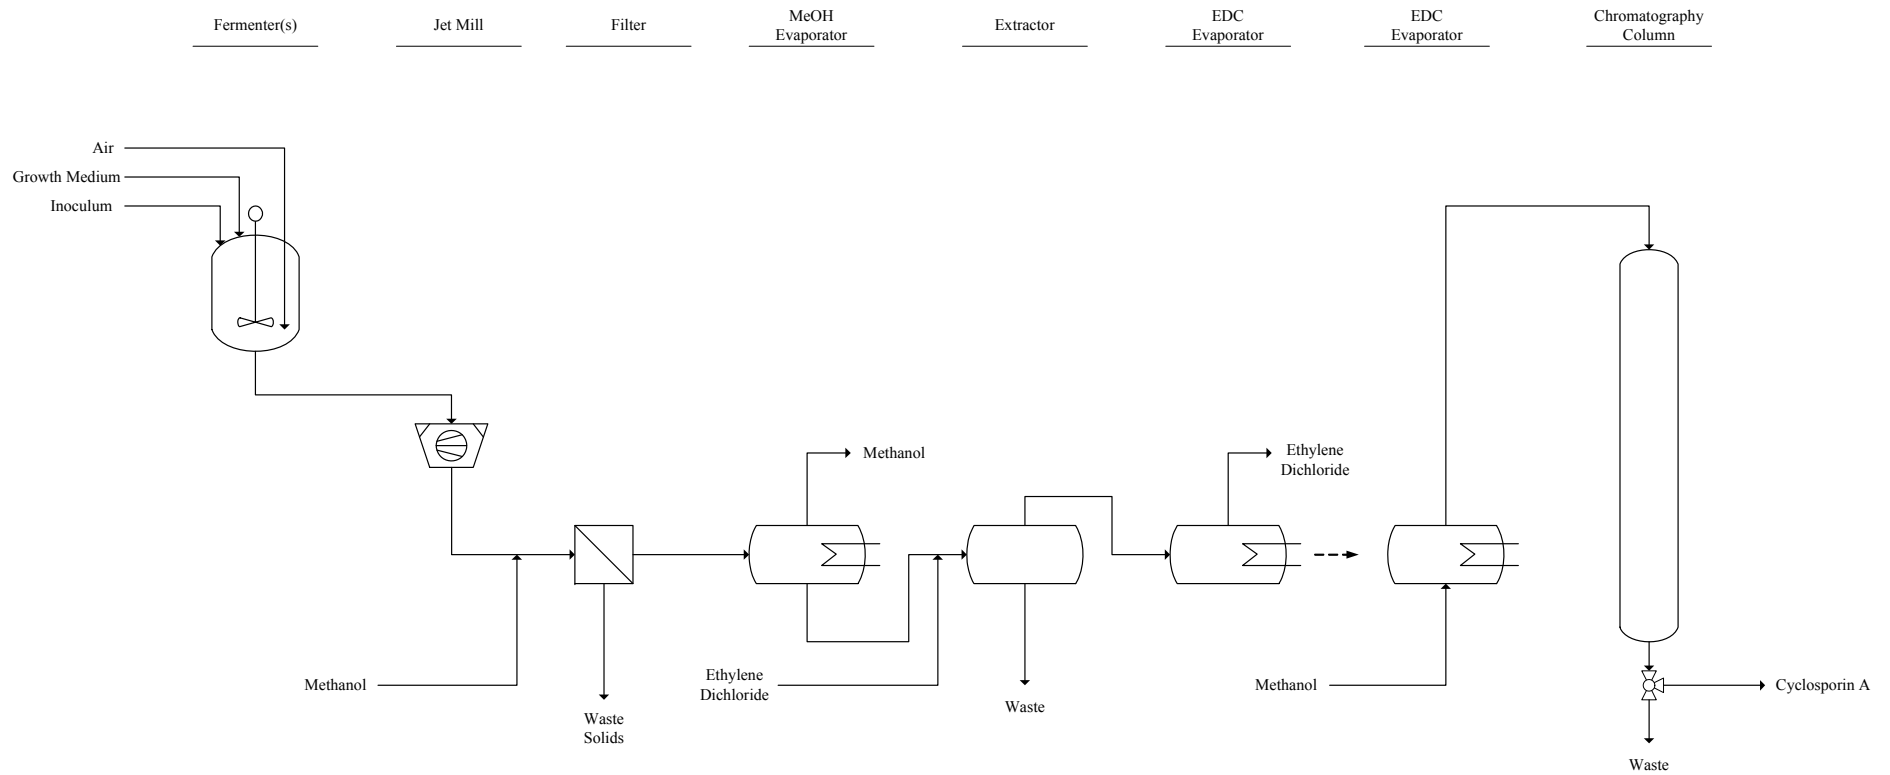



**Solution 2.4**

Basis for calculation: 100 kmol dry gas

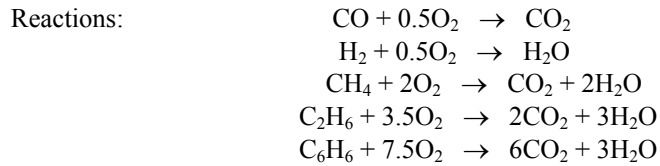


	REACTANTS		PRODUCTS		
	Syn. Gas	O <sub>2</sub>	CO <sub>2</sub>	H <sub>2</sub> O	N <sub>2</sub>
CO <sub>2</sub>	4		4		
CO	16	8	16		
H <sub>2</sub>	50	25		50	
CH <sub>4</sub>	15	30	15	30	
C <sub>2</sub> H <sub>6</sub>	3	10.5	6	9	
C <sub>6</sub> H <sub>6</sub>	2	15	12	6	
N <sub>2</sub>	10				10
Totals	100	88.5	53	95	10

If Air is N<sub>2</sub>:O<sub>2</sub> = 79:21

$$\begin{aligned} \text{N}_2 \text{ with combustion air} &= 88.5 \times 79/21 = 332.9 \text{ kmol} \\ \text{Excess O}_2 &= 88.5 \times 0.2 = 17.7 \text{ kmol} \\ \text{Excess N}_2 &= 17.7 \times 79/21 = 66.6 \text{ kmol} \\ \text{Total} &= 417.2 \text{ kmol} \end{aligned}$$

- (i) Air for combustion = 417.2 + 88.5 = 505.7 kmol  
(ii) Flue Gas produced = 53 + 95 + 10 + 417.2 = 575.2 kmol  
(iii) Flue Gas analysis (dry basis):

N <sub>2</sub>	409.5 kmol	85.3 mol %
CO <sub>2</sub>	53.0 kmol	11.0 mol %
O <sub>2</sub>	17.7 kmol	3.7 mol %
	<hr/> 480.2 kmol	<hr/> 100.0 mol %

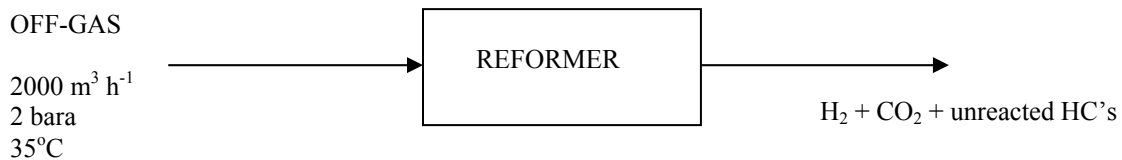**Solution 2.5**

At low pressures vol% = mol%

- (i) Basis: 1 kmol of off-gas

Component	mol%	MW	mass (kg)
CH <sub>4</sub>	77.5	16	12.40
C <sub>2</sub> H <sub>6</sub>	9.5	30	2.85
C <sub>3</sub> H <sub>8</sub>	8.5	44	3.74

C <sub>4</sub> H <sub>10</sub>	4.5	58	$\frac{2.61}{21.60}$
			$\Sigma$


So the average molecular mass = 21.6 kg kmol<sup>-1</sup>

(ii) At STP, 1 kmol occupies 22.4 m<sup>3</sup>

$$\text{Flow rate of gas feed} = \left( \frac{2000}{22.4} \right) \left( \frac{2 \times 10^5}{1.013 \times 10^5} \right) \frac{273}{(273 + 35)} = 156.248 \text{ kmol h}^{-1}$$

$$\text{Mass flow rate} = (156.248)(21.60) = 3375 \text{ kg h}^{-1}$$


(iii) Basis: 100 kmol of feed



Component	<i>n</i>	Amount CO	H <sub>2</sub>	
CH <sub>4</sub>	1	77.5	77.5	232.5
C <sub>2</sub> H <sub>6</sub>	2	9.5	19.0	47.5
C <sub>3</sub> H <sub>8</sub>	3	8.5	25.5	59.5
C <sub>4</sub> H <sub>10</sub>	4	4.5	18.0	40.5
		$\Sigma$	140.0	380.0

$$\text{If the conversion is 96\%, then: } H_2 \text{ produced} = (380.0)(0.96) = 364.8 \text{ kmol}$$

$$CO \text{ produced} = (140.0)(0.96) = 134.4 \text{ kmol}$$




$$\text{If the conversion is 92\%, then: } H_2 \text{ from CO} = (134.4)(0.92) = 123.65 \text{ kmol}$$

$$\text{Total } H_2 \text{ produced} = 364.8 + 123.65 = 488.45 \text{ kmol/100 kmol feed}$$

If the gas feed flow rate = 156.25 kmol h<sup>-1</sup>, then

$$H_2 \text{ produced} = 156.25 \left( \frac{488.45}{100} \right) = 763.20 \text{ kmol h}^{-1} \equiv (763.2)(2) = 1526 \text{ kg h}^{-1}$$

### Solution 2.6



(Conversion = 97 %)

Basis: 1000 kg RCl feed

Relative molecular masses:

CH <sub>2</sub> =CH-CH <sub>2</sub> Cl	76.5
CH <sub>2</sub> =CH-CH <sub>2</sub> OH	58.0
(CH <sub>2</sub> =CH-CH <sub>2</sub> ) <sub>2</sub> O	98.0

$$\begin{aligned}
\text{RCl feed} &= \frac{1000}{76.5} = 13.072 \text{ kmol} \\
\text{RCl converted} &= (13.072)(0.97) = 12.68 \text{ kmol} \\
\text{ROH produced} &= (12.68)(0.9) = 11.41 \text{ kmol} \\
\text{ROR produced} &= 12.68 - 11.41 = 1.27 \text{ kmol} \\
\text{Mass of allyl-alcohol produced} &= (11.41)(58.0) = 661.8 \text{ kg} \\
\text{Mass of di-ally ether produced} &= (1.27)(98.0) = 124.5 \text{ kg}
\end{aligned}$$

### **Solution 2.7**

Basis: 100 kmol nitrobenzene feed.


(a, b)

The conversion of nitrobenzene is 96% and so  $100(1 - 0.96) = 4$  kmol are unreacted.


The selectivity for aniline is 95% and so aniline produced =  $(96)(0.95) = 91.2$  kmol

Therefore, the balance is to cyclohexylamine =  $96 - 91.2 = 4.8$  kmol

From the reaction equations:



1 mol of aniline requires 3 mol of H<sub>2</sub>



1 mol of cyclohexylamine requires 6 mol of H<sub>2</sub>

Therefore, H<sub>2</sub> required for the reactions =  $(91.2)(3) + (4.8)(6) = 302.4$  kmol

A purge must be taken from the recycle stream to maintain the inerts below 5%. At steady-state conditions:

$$\text{Flow of inerts in fresh H}_2 \text{ feed} = \text{Loss of inerts from purge stream}$$

Let the purge flow be  $x$  kmol and the purge composition be 5% inerts.

$$\text{Fresh H}_2 \text{ feed} = \text{H}_2 \text{ reacted} + \text{H}_2 \text{ lost in purge}$$

$$= 302.4 + (1 - 0.05)x$$

$$\text{Inerts in the feed at 0.005 mol fraction (0.5\%)} = (302.4 + 0.95x) \frac{0.005}{1 - 0.005}$$

$$= 1.520 + 4.774 \times 10^{-3}x$$

$$\text{Inerts lost in purge} = 0.05x$$

$$\text{So, equating these quantities: } 0.05x = 1.520 + 4.774 \times 10^{-3}x$$

$$\text{Therefore: } x = 33.6 \text{ kmol}$$

The purge rate is 33.6 kmol per 100 kmol nitrobenzene feed.

$$\text{H}_2 \text{ lost in the purge} = 33.6(1 - 0.05) = 31.92 \text{ kmol}$$

$$\text{Total H}_2 \text{ feed} = 302.4 + 31.92 = 334.3 \text{ kmol}$$

